

MyConnect Quick Start Guide – Installer Edition

 To be combined with the MyConnect Hub Manual: *For installers setting up MyCheckr + MyConnect Hub quickly and reliably.*

[Download Manual](#)

- 1. Introduction
- 2. What You Need Before Starting
- 3. Physical Installation Layout
- 4. Step-by-Step Setup Guide
 - Step 1 — Mount and Power the Devices
 - Install the MyCheckr
 - Step 2 — Install and Power the MyConnect Hub
 - Hub Placement
 - Step 3 — Wire Any Relays (If Using Access Control)
 - Relay Output Layout
 - Wiring Steps
 - 3. Connect the PSU and load
 - 4. Secure all terminal screws
 - 5. Confirm GPIO settings in MyConnect App
 - Step 4 — Connect the Tablet & Open MyConnect App
 - Step 5 — Add and Register the MyCheckr
 - Step 6 — Configure Device Rules
 - Step 7 — Assign Relay Actions (Hub Outputs)
 - Step 8 — Test the System
- 5. Post-installation verification (installer sign-off)
 - 5A. Basic – Must verify before leaving site
 - 5B. Advanced – Verify if required (site-dependent)
 - 5C. Final outro checklist – before you leave

1. Introduction

This Quick Start Guide provides a **practical, step-by-step setup sequence** for installers deploying a **MyCheckr + MyConnect Hub** environment.

It condenses the essential steps from the full environment manual (network, hub setup, MyCheckr registration, relay wiring, app configuration) so the installation can be completed efficiently on-site.


For full wiring diagrams, I/O pinouts, and advanced configurations, refer to the **MyConnect Environment Manual**.

2. What You Need Before Starting

Category	Item	Included in Standard Kit?	Check
MyCheckr Kit	MyCheckr device	Yes	☐
	MyCheckr power supply	Yes	☐
	MyCheckr mount (required)	No	☐
	MyCheckr extension power cord (optional)	No	☐
MyConnect Hub Kit	MyConnect Hub	Yes	☐
	Hub power supply	Yes	☐
	Hub power extension cord (if required)	No	☐
Cabling	Ethernet cable (10 m) – qty 2	Yes	☐
	Relay cable	Yes	☐
Network Equipment	Router (preconfigured or blank)	Yes	☐
Tablet Kit	Android tablet (required)	No	☐
	Tablet charger (required)	No	☐
	Tablet protective case and stand (optional)	No	☐

3. Physical Installation Layout


Below is the standard installation layout.

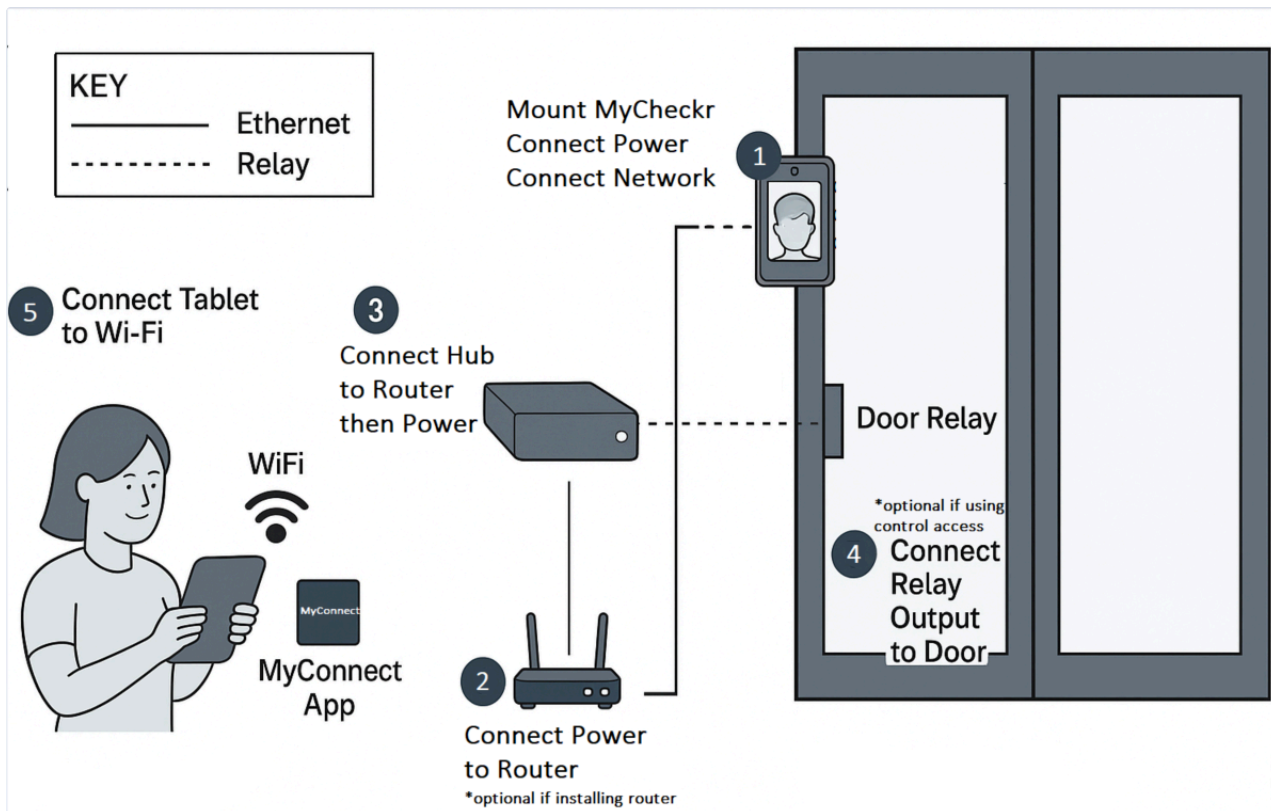

4. Step-by-Step Setup Guide

Step 1 — Mount and Power the Devices

Install the MyCheckr

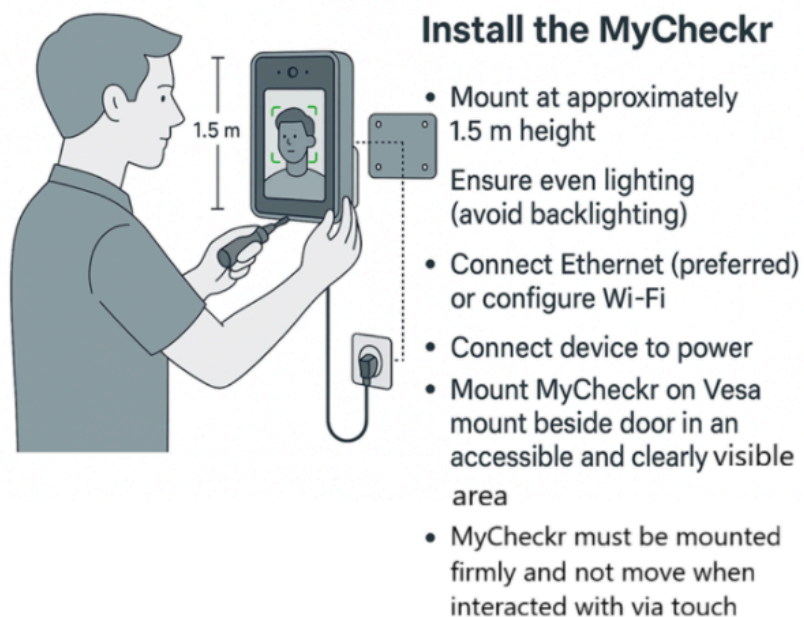

For connecting the MyCheckr to the WiFi please follow the MyCheckr manual: MyCheckr Range Software Installation and Configuration ([MyCheckr Range Documentation](#))

Step 2 — Install and Power the MyConnect Hub


Hub Placement

- Must be **Ethernet-connected** (hub does not support Wi-Fi) to the router/network switch.
- To reach ethernet socket on the hub, please take the lid off with TR8 screw driver.

Important: Power the hub on only after the MyCheckr and Network Router has been powered on already.

- Power on the device by plugging the device to the mains.
- The hub can be placed anywhere near a network switch and power source. **IF** the hub is being used for automating access control, it would have to be placed near the relay control wires coming from the door controller.

Connect Hub to Power

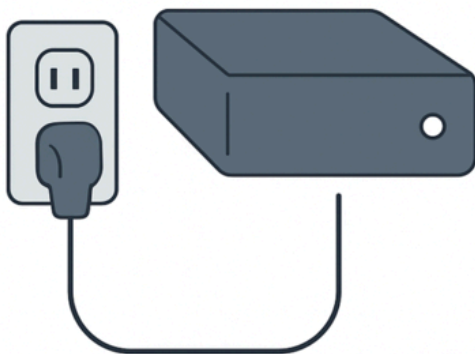

Connect Hub to Router



- In summary place close to:
 - Power source, network and Door strike or lock (if using relay)
 - Power source and network (if not using relay)

Step 3 — Wire Any Relays (If Using Access Control)


Please skip this step and head over to Step 4 if you are not planning to use access control

The MyConnect Hub includes **two onboard relays** that can be used to control external devices such as **electric door strikes, maglocks, beacons, or warning lights**.

This step is only required if the installation includes **access control** or **signal output**.

Relay Output Layout

- **Relay 1 terminals:** Pins **10 (NO)**, **11 (NC)**, **12 (COM)**
- **Relay 2 terminals:** Pins **7 (COM)**, **8 (NC)**, **9 (NO)**
- The hub uses **dry contact relays**, meaning the installer must supply the appropriate **12/24V PSU** for the connected door hardware.

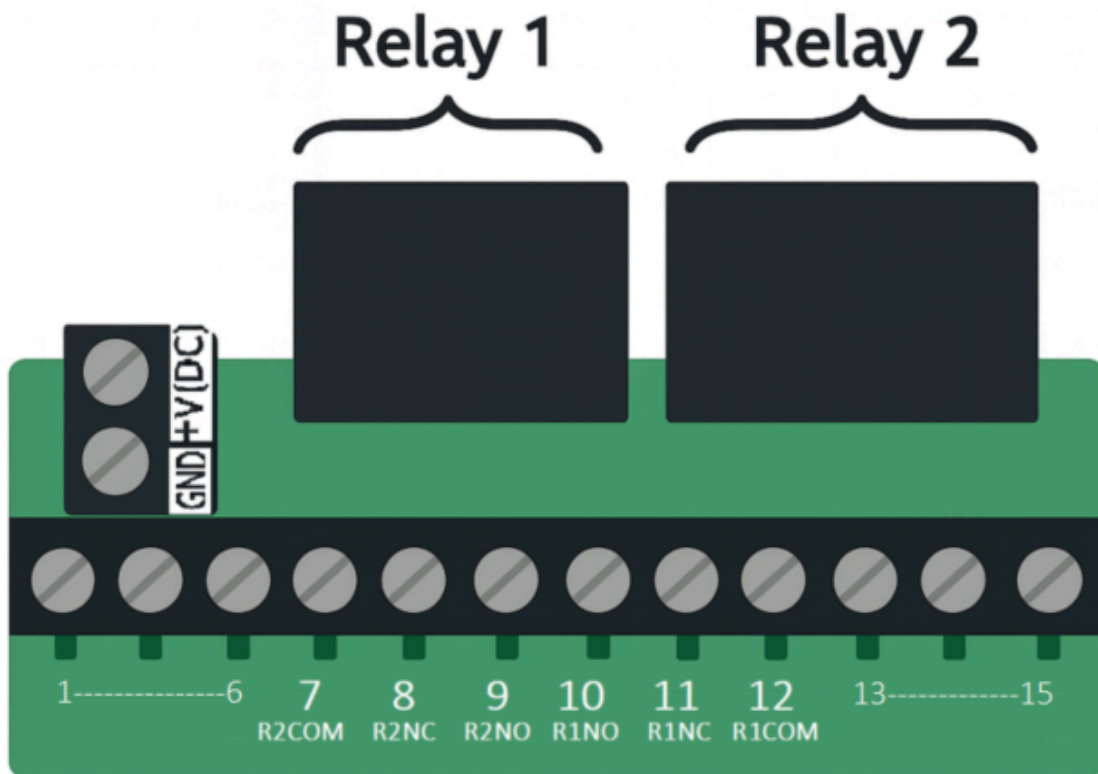

Simplified vector diagram of the relay block for user guidance

Wiring Steps

1. Identify the relay used for the installation

- **Relay 1** is typically used for **main door access**.
- **Relay 2** can be used for **secondary doors** or **warning outputs** (e.g., underage beacon).

2. Choose the correct output type

Installers must determine whether the connected device uses:

- **NO (Normally Open):**
 - Power flows only when the relay activates.
 - Common for **door strikes** and **beacons**.
- **NC (Normally Closed):**
 - Circuit is normally closed and opens on activation.
 - Used for **fail-safe maglocks** (power is cut when unlocked).

3. Connect the PSU and load



For specific examples refer to the [wiring manual](#) that can be found in the MyConnect Environment Manual

4. Secure all terminal screws

Relay terminals are small; ensure:

- Wires are fully inserted
- No copper strands exposed
- Screws are firmly tightened

Loose wiring is the most common cause of intermittent unlock failures.

5. Confirm GPIO settings in MyConnect App

- Go to **Settings → Age** or **Settings → Face**
- Add an action
- Select **GPIO**
- Choose:
 - **GPIO 1 = Relay 1**
 - **GPIO 2 = Relay 2**

Set **GPIO duration** (recommended: **1 second**) from the Hub settings menu.

Installer Notes

- Always test the relay immediately after wiring
- Ensure the output voltage matches the connected hardware
- Run relay cables neatly and away from moving parts
- If the customer's door system uses a **sensor board**, wiring should be made to the board's **signal terminals**, not directly to the lock

 Please refer to [MyConnect Hub: Wiring Manual](#) for full wiring details

Step 4 — Connect the Tablet & Open MyConnect App


App Setup

1. Connect the tablet to the **same WiFi network** as the Hub + MyCheckr.

 Connect the tablet to the WiFi network of the router to which the Hub and MyCheckr connect via ethernet.

2. Download and Install MyConnect App ([📱 MyConnect Environment Doc & Apps](#))

3. Locate the MyConnect App in the Downloads folder of the My Files app on the tablet.
Enable installation from My Files by overriding the tablet's default setting and security alert when prompted.
4. Launch the **MyConnect App**.
5. Tap **Search for Hub**.

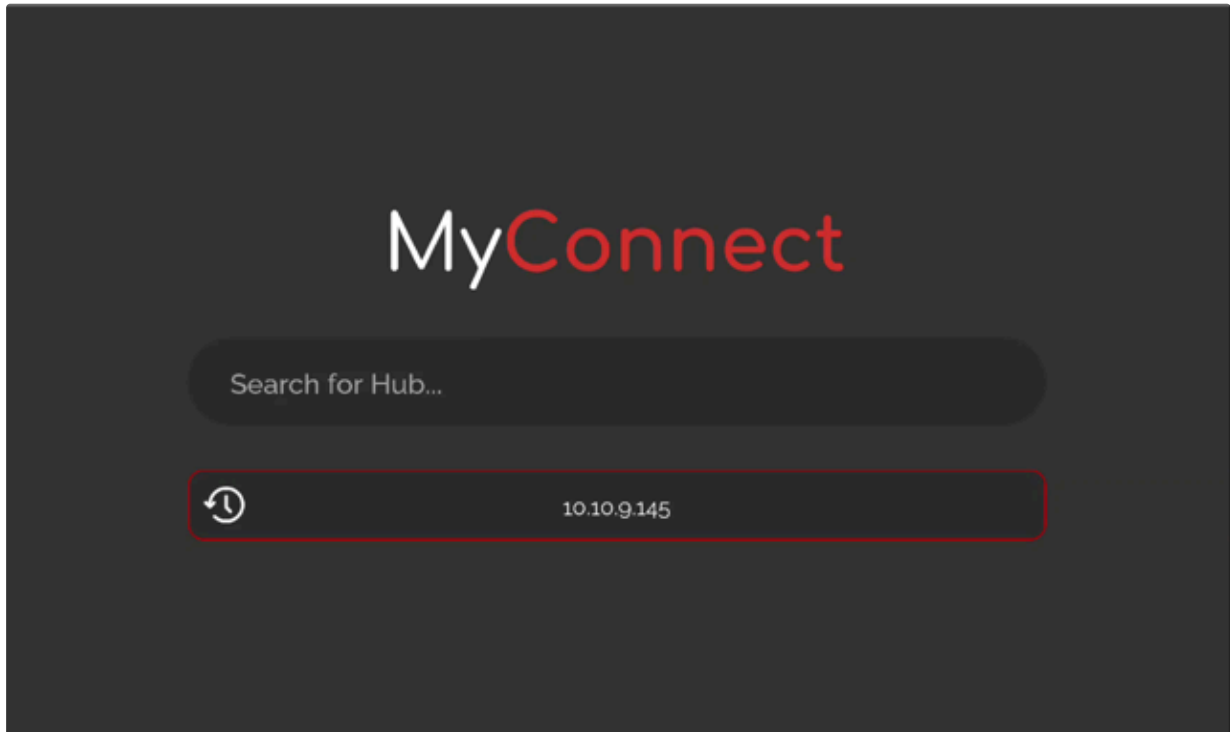

 For more details and step by step configuration please refer to the MyConnect App section of the MyConnect Environment manual found in this [folder](#).

If discovery fails:

- Check multicast is allowed OR
- Manually enter IP by finding the hub IP in the router network manager (please refer to your router guide).


Login Credentials (Default)

- **Username:** user1
- **Password:** password1

Step 5 — Add and Register the MyCheckr

Device Discovery

- Go to **Settings → Device**
- The app will display any active MyCheckr units

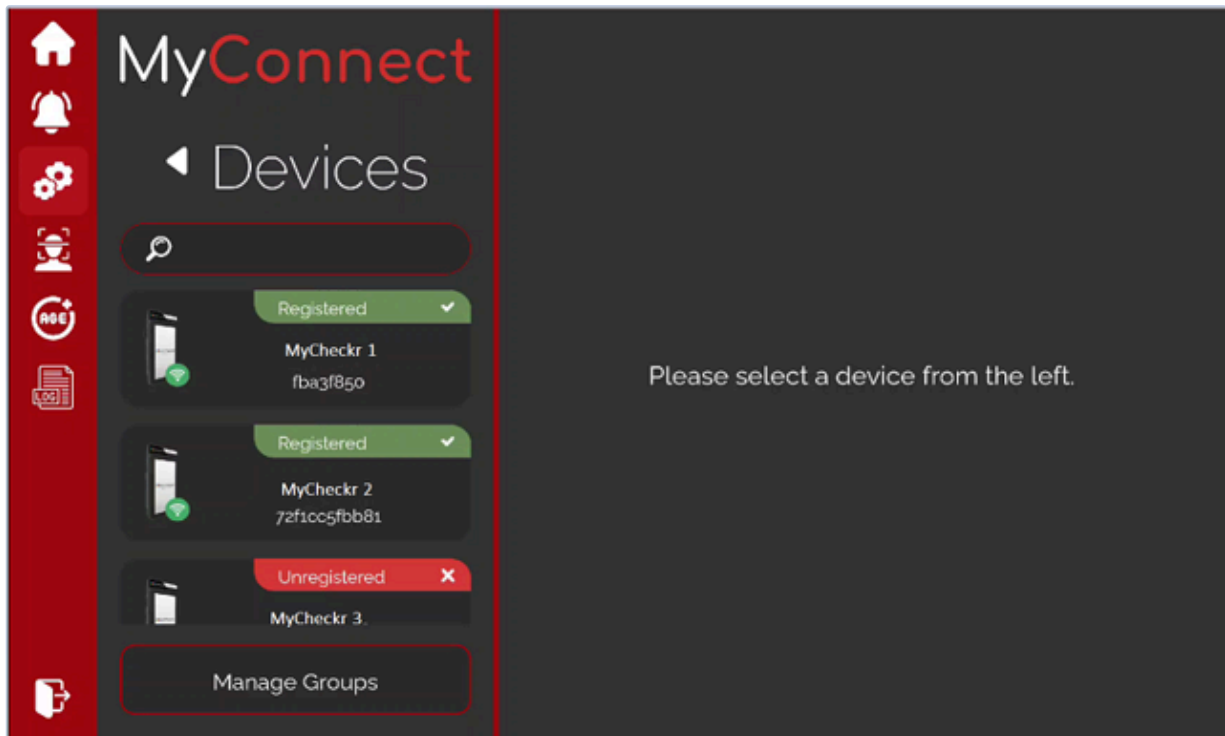

Register the device

Enter API credentials (defaults unless changed):

- Username: apiuser
- Password: apipassword


Once registered, the device turns **green** in the app.

Step 6 — Configure Device Rules

Age Detection Settings

Under **Settings** → **Age**:

- Set “Challenge Age” (e.g.25 default)
- Enable **Underage alerts** (click on the bell icon on top right)
- Enable **Overage access rule** if controlling a door

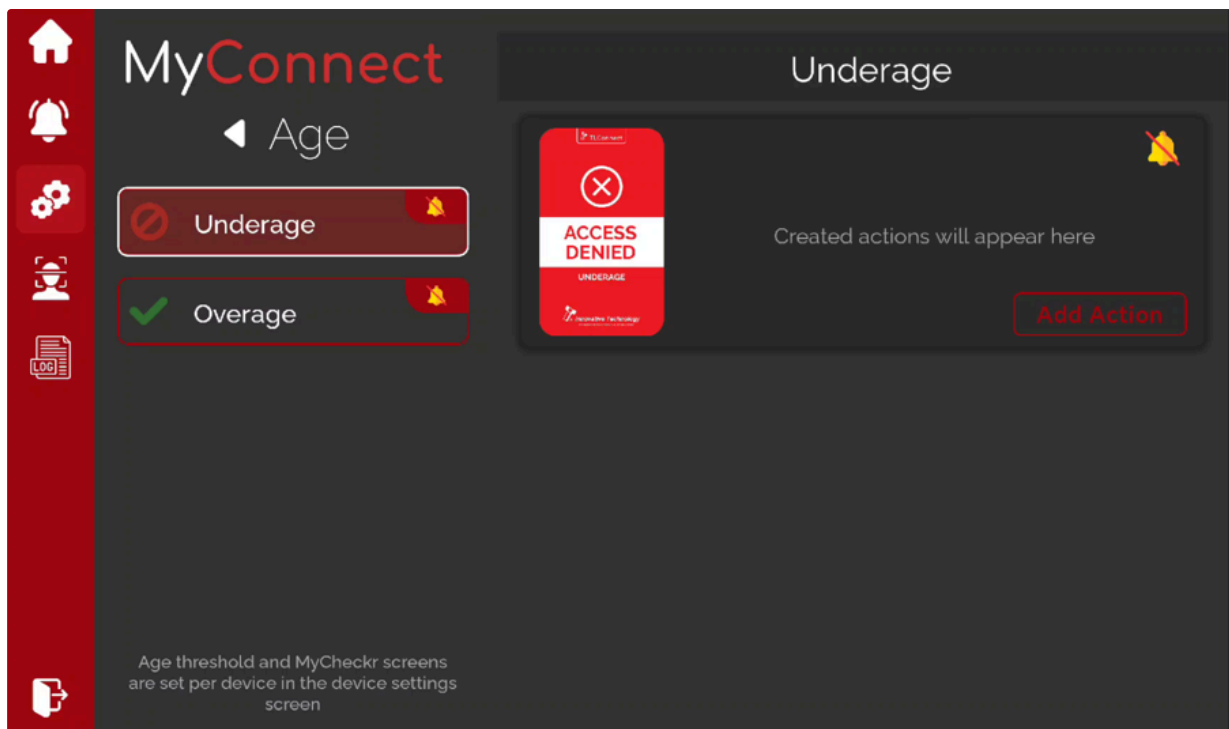

Step 7 — Assign Relay Actions (Hub Outputs)

Please skip this step and head over to Step 8 if you are not planning to use access control

Setting Actions


Go to **Settings → Age → Overage → Add Action**

Steps:

- **Connected device** → Only selected device will trigger the action when condition is fulfilled.
- Input action name
- Select action type (eg. Hub Relay)
- Select output data pin
- Select group that would trigger that action

Common Installer Actions:

- **Overage → Relay 1 → Unlock Door**
- **Underage → Relay 2 → Flash Beacon**

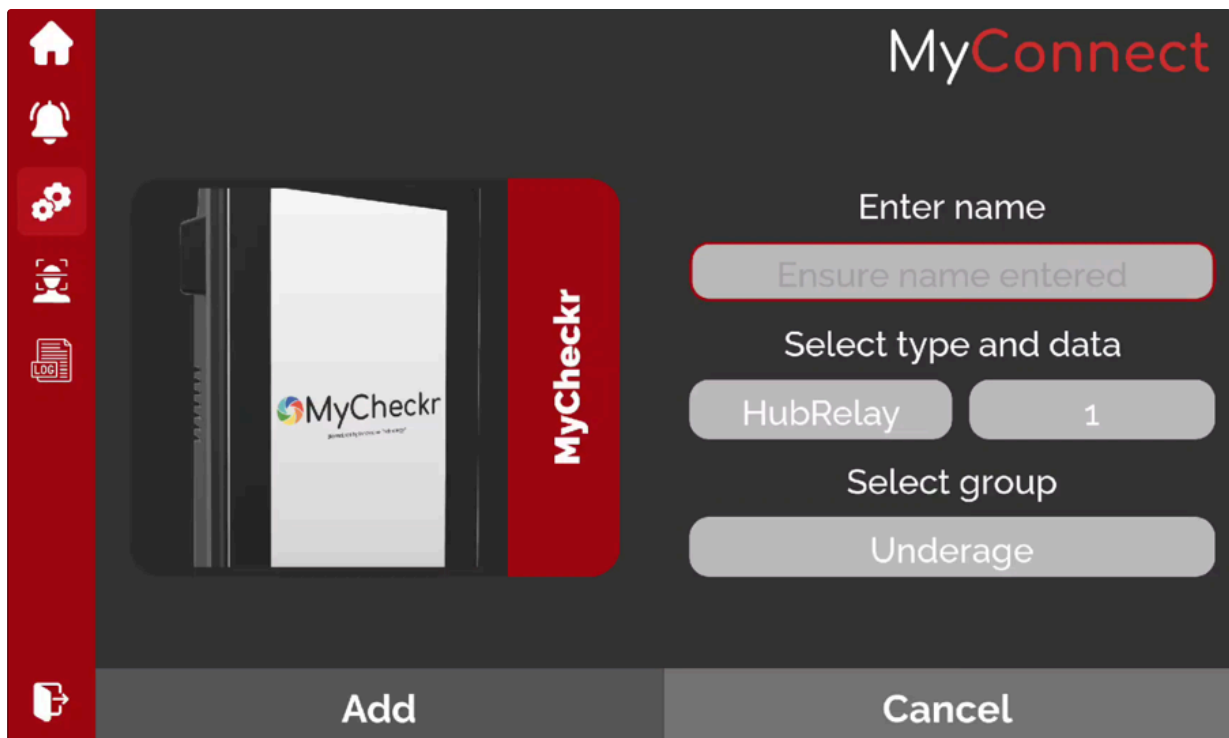


The screenshot shows the 'MyConnect' application interface for adding a new 'MyCheckr' device. On the left is a vertical red sidebar with icons for Home, Notifications, Settings, Profile, and Logs. The main area has a dark background. At the top right is the 'MyConnect' logo. Below it, the text 'Enter name' is followed by a text input field containing the placeholder 'Ensure name entered'. Below that, 'Select type and data' is followed by a 'HubRelay' button and a numeric input field with the value '1'. Then, 'Select group' is followed by an 'Underage' button. At the bottom are two large buttons: 'Add' and 'Cancel'. In the center, there is a graphic of a tablet displaying the 'MyCheckr' logo and a red vertical bar with the word 'MyCheckr' written vertically.

 Make sure **GPIO Duration = 1s** from Hub settings unless intended otherwise.

Step 8 — Test the System

Validation Steps

- Approach the MyCheckr with a person under/over age
- Confirm alerts appear on tablet
- Confirm relay activates (door/light)
- Confirm logs update

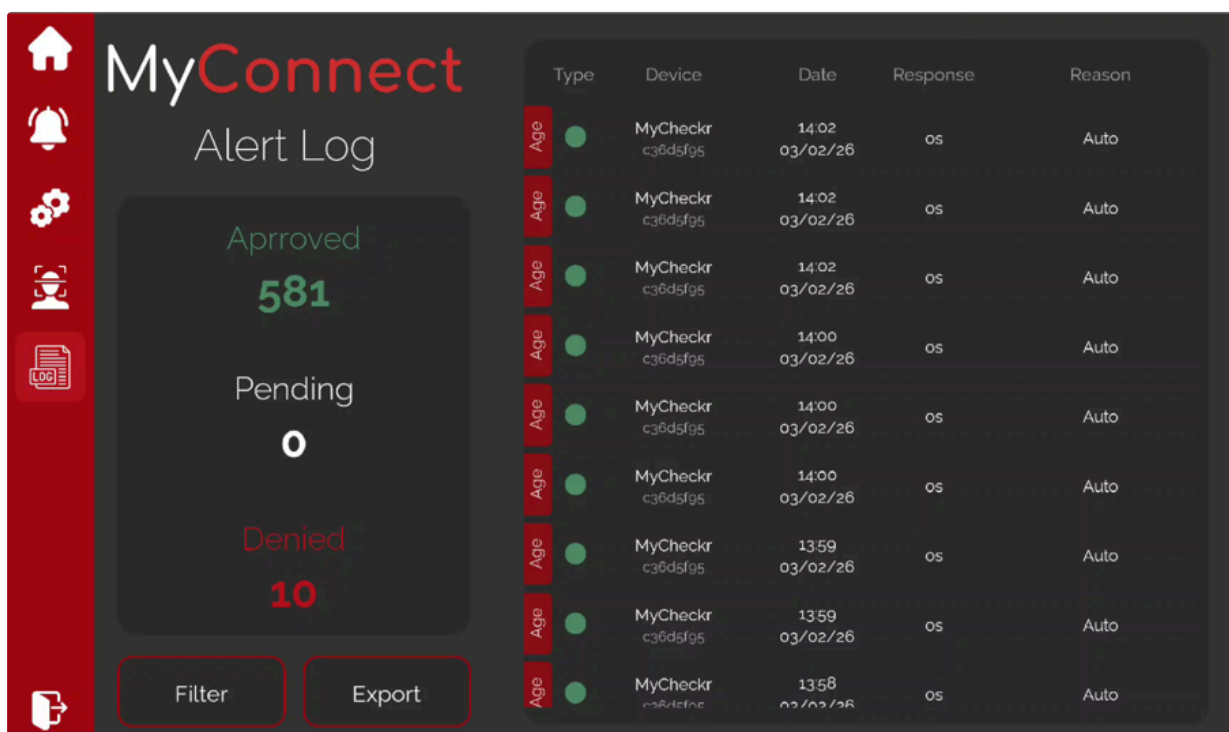

The screenshot shows the 'MyConnect' application interface for the 'Alert Log'. On the left is the same red sidebar as in the previous screen. The main area has a dark background. At the top right is the 'MyConnect' logo. Below it is the title 'Alert Log'. In the center-left, there are three summary statistics: 'Approved 581' in green, 'Pending 0' in white, and 'Denied 10' in red. At the bottom left are two buttons: 'Filter' and 'Export'. On the right is a table with the following columns: Type, Device, Date, Response, and Reason. The table contains 10 rows of data, all with 'Age' as the Type, 'MyCheckr c36dsf95' as the Device, and 'Auto' as the Reason. The dates and times vary slightly.

Type	Device	Date	Response	Reason
Age	MyCheckr c36dsf95	14:02 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	14:02 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	14:02 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	14:00 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	14:00 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	14:00 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	13:59 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	13:59 03/02/26	OS	Auto
Age	MyCheckr c36dsf95	13:58 03/02/26	OS	Auto

 For advance checklist please refer to [MyConnect Environment Installation - Advance Pre-requisites Setup Guide](#)

5. Post-installation verification (installer sign-off)

5A. Basic – Must verify before leaving site

Category	Verification Step	Check
Power & Devices	MyCheckr powers on with visible display	☐
	MyConnect Hub powered with stable LEDs	☐
Network	Hub discovered in the MyConnect App (or reachable via manual IP)	☐
	MyCheckr appears online and green in Devices list	☐
	Tablet communicates with Hub and MyCheckr	☐
Initial Setup	Age threshold set correctly	☐
	Screens (Home / Pass / Fail) display correctly on MyCheckr	☐
Alerts	Underage test produces an alert on the tablet	☐
	Overage test triggers correct action or acknowledgment	☐
Outputs (If Used)	Door strike / beacon / relay output activates as expected	☐
	Relay duration behaves correctly (default ~1s)	☐

Logs	Alerts appear in logs with correct timestamps	☐
	Approve / Deny actions work in real-time	☐
Handover	Attendant shown how to use the tablet alert screen	☐

5B. Advanced – Verify if required (site-dependent)

Category	Verification Step	Check
Network Environment	VLAN or segmented network tested successfully	☐
	Firewall exceptions confirmed working (if needed)	☐
System Features	Dual action (API + Relay) tested if configured	☐
	Fail-safe NC wiring tested (if implemented)	☐
Optional Features	Face enrolment workflow tested (if enabled)	☐
	Consent confirmation tested (if required)	☐
Reports	Export functions (CSV / PDF / TXT) tested	☐
	Analytics page shows device activity	☐

5C. Final outro checklist – before you leave

This final section is a short, single checklist ensuring nothing has been forgotten. Installers are expected to tick **all** items before signing off.

Final Confirmation	Check
--------------------	-------

All devices powered, connected, and mounted securely	☐
Network connection stable and verified (auto-discover or manual IP)	☐
Alerts trigger correctly and tablet receives notifications	☐
Relay/door outputs fully tested (if applicable)	☐
Attendant trained on approving/denying alerts	☐
Customer understands basic troubleshooting steps	☐
All cables neatly routed and workspace left tidy	☐
All optional equipment (mounts, extensions, router) returned or logged	☐
Installer has recorded device serials & IP addresses	☐
Confirmation received from customer representative	☐
